

Product Data Sheet

Barbed Wire



Barbed wire is made of high-quality mild steel wire. There are different types of barbed wire as the state of the barbed wire surface.



For the basis using, barbed wire often uses the galvanized wire with the wire diameter of 2.8mm. Spikes often use the inner material of galvanized wire with the wire diameter of 2.0mm. The barbed wire specification can be supplied as special need. The galvanized wire diameter, barb spacing, barbed wire length, per coil weight, packing is all as customer

OZ Factory Company:

(An ISO 9001:2015 Accredited company)

Post Box: 31969: Riyadh – 11418: Kingdom of Saudi Arabia


Tel: 011 244 2211: Fax: 011 244 1188

Email: info@ozfactory.com.sa




Product Data Sheet

Barbed Wire


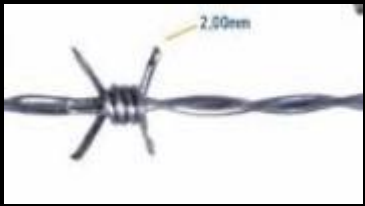
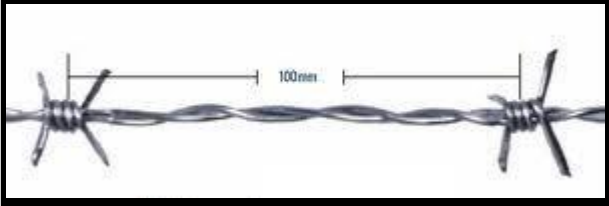


Barbed Wire consists of two strands of wire twisted together with barbs placed at predetermined distances. Reverse twist is the new standard used by us in its high tensile barbed wire products. The reverse twist design alternates the direction of the two wires at the barbs to reduce sagging and better hold the barbs in place and adds memory to the barbed wire which results in less maintenance and repair.



The barbs on barbed wire are offered in two varieties, 2 point or 4 points.

Barbing wire with double stranded line wire specifications:

Line / Strand wire	Barbing wire	Pitch
		
1.80 – 2.80 mm	1.80 – 2.40 mm	75mm (3 inch) to 150mm (6 inch)

Zinc coating on Barbed wire can vary from commercial grade to heavy galvanized up to 275 grams per square meter.

We bring forth PVC coated barbed wire which further improves the life of the product and is usually offered with both the line wire and barb wire specification of core wire diameter 1.8mm and outer diameter 2.6mm. PVC barbed wire is more suitable for the single twist barbed wire fencing.

A new product added under barb wire category is a single strand barb wire – in this wire the line wire is a single wire instead of a double wire, and this single wire is high tensile wire, which makes cutting of this wire difficult. Often two lines of this wire are placed close to each other and clipped at certain periodic intervals

OZ Factory Company:

(An ISO 9001:2015 Accredited company)

Post Box: 31969: Riyadh – 11418: Kingdom of Saudi Arabia

Tel: 011 244 2211: Fax: 011 244 1188

Email: info@ozfactory.com.sa

