

Products Data Sheet

CHAIN LINK FENCE GATES

OZ Factory Company manufactures, Galvanized and Full Colour Chain Link Gates variety of styles, heights and specifications. Gates styles available are Single Swing (Welded or Bent Tube), Double Swing (Welded), and Slide Cantilever.



❖ WELDED SINGLE SWING GATES



Welded Single Swing gates are the industry standard among fencing professionals due to the strength of an all welded construction and the added security of square corners. Single Swing gates are available for large opening sizes up to 2000 mm and to match all fence heights. The standard opening size is 1200 mm but any size can be made to fit your needs. Gates (frame, mesh, hardware) are manufactured in three standard finishes: Galvanized, Powder coated & PVC coated.

Welded gates offer an added degree of enclosure due to the square corner construction that reduces the space between the posts and the bottom gate corners. Functional requirements and site layout should always be

considered before selecting your style of gate.

OZ Factory Company:

(An ISO 9001:2015 Accredited company)

Post Box: 31969: Riyadh – 11418: Kingdom of Saudi Arabia

Tel: 011 244 2211: Fax: 011 244 1188

Email: info@ozfactory.com.sa



Products Data Sheet

CHAIN LINK FENCE GATES

Note that Gate "Opening Size" refers to the distance from inside face to inside face of the gate posts. Gate "Outside Measurement" refers to the dimension from outside edge to outside edge of the gate panel. The difference between the Opening Size and Outside Measurement is the tolerance required for the gate hinge and gate latch dimensions.

❖ WELDED DOUBLE SWING

Welded Double Swing Gates are the economical and functional solution for securing larger openings such as driveways and trailer pads. The two gate panels, which form the double swing gate, allow for less opening space than a long single gate and allow for partial opening if full access is not required.



Double Swing gate are available for large opening sizes up to 10000 mm (5000 mm each side) and to match all fence heights. Gates (frame, mesh, hardware) are manufactured in three standard finishes: Galvanized, Powder coated & PVC coated. Double swing gates come with a welded on drop pin and chain for locking the two panels together as well as a foot bolt (cane bolt) to secure one panel into the ground surface. Welded gates offer an added degree of enclosure due to the square corner construction that reduces the space between the posts and the bottom gate corners. Functional requirements and site layout should always be considered before selecting your style of gate.

❖ SLIDE CANTILEVER

Slide Cantilever Gates are optimal for larger openings where the arc of the swing gate will interfere with obstructions and in applications requiring automatic gate operators. The operation of Cantilever Gates is based on a gate panel that slides through the gate opening in a linear motion fully supported above ground and between two counter balance posts each with a top and bottom roller assembly. Gate panels are typically manufactured to an overall length of "1.5 times the opening size plus 1200 mm so as to provide a counter balance section for support between the two counter balance posts.



OZ Factory Company:

(An ISO 9001:2015 Accredited company)

Post Box: 31969: Riyadh – 11418: Kingdom of Saudi Arabia

Tel: 011 244 2211: Fax: 011 244 1188

Email: info@ozfactory.com.sa



Products Data Sheet

CHAIN LINK FENCE GATES

Note that there must be an adequate length of fence or an open clear line on the outside of the counter balance posts for the gate panel to slide into the fully open position. Cantilever gates are available to match all fence heights and in opening sizes up to 16.00 meter as a single slide (20.00 meter as a double slide).

Gates are manufactured from a welded galvanized steel construction and available in three standard finishes: Galvanized, Powder coated & PVC coated. The most reliable and functional style of automatic electric gate operators for high usage in hot or cold weather applications are Slide Gate Operators (as opposed to Swing Gate Operators). For this reason, Slide Cantilever Gates are the ideal gate for applications requiring automatic gate operator systems. Functional requirements and site layout should always be considered before selecting your style of gate.



TUBULAR SYSTEM GATES

- GALVANISED TUBULAR SYSTEM GATES WITH BOTH CHAIN LINK AND WELDED MESH CLADDING
- SUITABLE FOR DOMESTIC OR HEAVY-DUTY FENCING
- GALVANISED FINISH WITH OPTIONAL POLYESTER POWDER COATING
- SINGLE OR DOUBLE LEAF FOR INDUSTRIAL USE ETC.
- SECURITY OPTIONS - AS WITH FENCING SYSTEM EXTENSIONS FOR BARBED WIRE OR TAPES
- TUBULAR CONSTRUCTION FOR EXTRA STRENGTH - LESS VULNERABLE TO VANDALS

Products Data Sheet

OZ Factory Company:

(An ISO 9001:2015 Accredited company)

Post Box: 31969: Riyadh - 11418: Kingdom of Saudi Arabia

Tel: 011 244 2211: Fax: 011 244 1188


Email: info@ozfactory.com.sa



CHAIN LINK FENCE GATES

❖ DOUBLE SWING GATE - WELDED MESH (SANG)

- Width: 7.00 meter
- Height: 2450 mm
- Infill: Welded Mesh 50x50x4mm
- Posts: 150x150x5mm
- Shaped Tubes: Ø48.00 x2,5mm
- Finish : Hot Dip Galvanized / Polyester Coated / PVC Coated

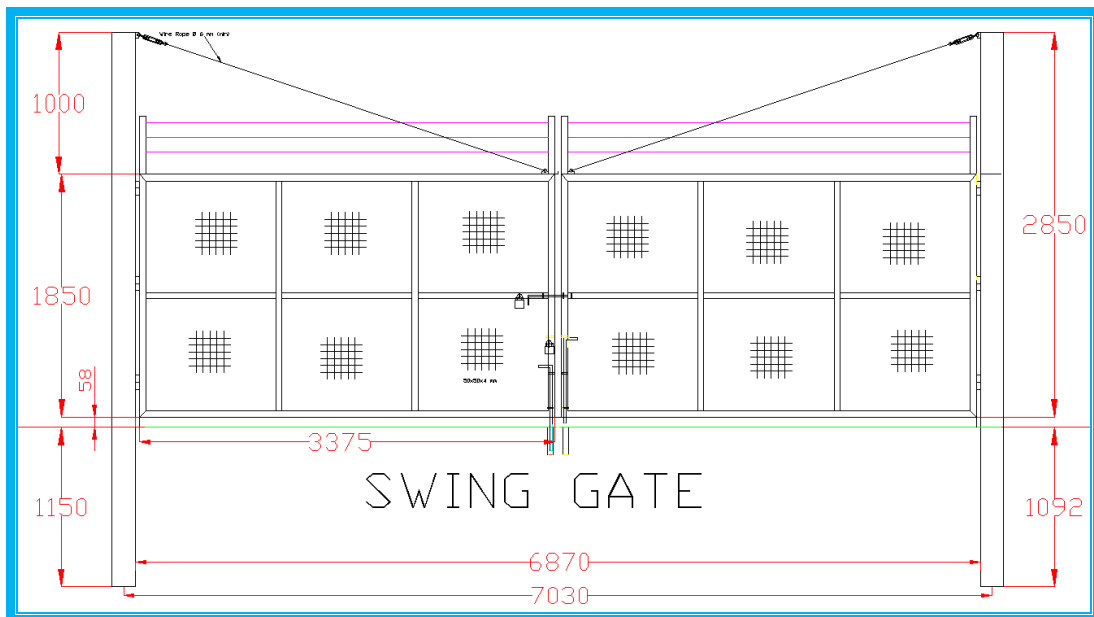

Products Data Sheet

OZ Factory Company:

(An ISO 9001:2015 Accredited company)

Post Box: 31969: Riyadh - 11418: Kingdom of Saudi Arabia

Tel: 011 244 2211: Fax: 011 244 1188


Email: info@ozfactory.com.sa



CHAIN LINK FENCE GATES

❖ DOUBLE SWING GATE - High Tension Wire (MOT & SAR & SRO)

- Width: 6.00 meter
- Height: 1800 mm
- Infill: Chain Link Fabric Mesh 50x50x3.76mm
- Posts: 114.00 x 6.02 x mm OD
- Shaped Tubes: Ø48.30 mm
- Coating : Hot Dip Galvanized

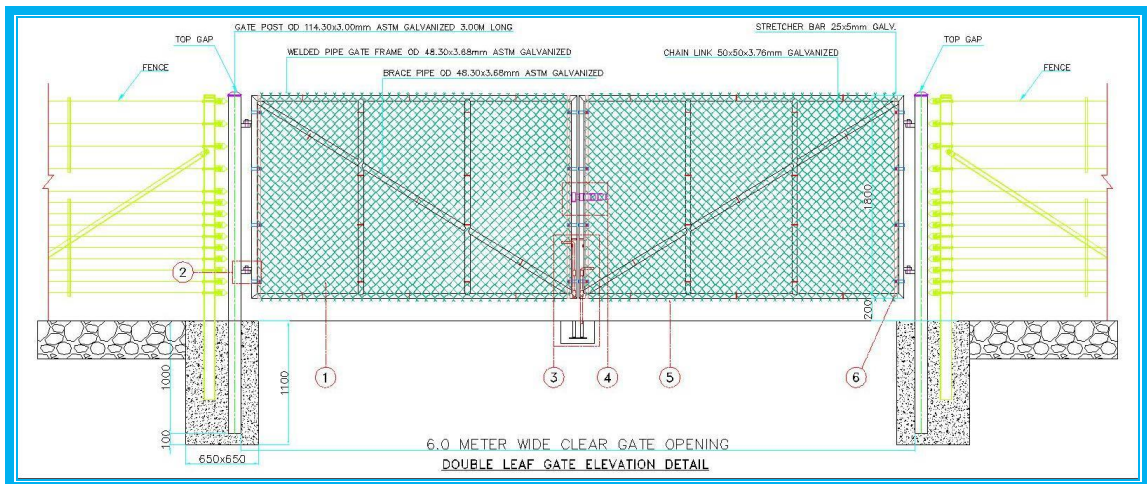

Products Data Sheet

OZ Factory Company:

(An ISO 9001:2015 Accredited company)

Post Box: 31969: Riyadh - 11418: Kingdom of Saudi Arabia

Tel: 011 244 2211: Fax: 011 244 1188


Email: info@ozfactory.com.sa



CHAIN LINK FENCE GATES

❖ DOUBLE SWING GATE - Chain Link Fence (RSADF)

- Width: 7.00 meter
- Height: 2800 mm
- Infill: Chain Link Fabric Mesh 50x50x3.76mm
- Posts: 114.00 x 6.02 x 4950 mm
- Shaped Tubes: Ø60.30 mm
- Coating : Hot Dip Galvanized

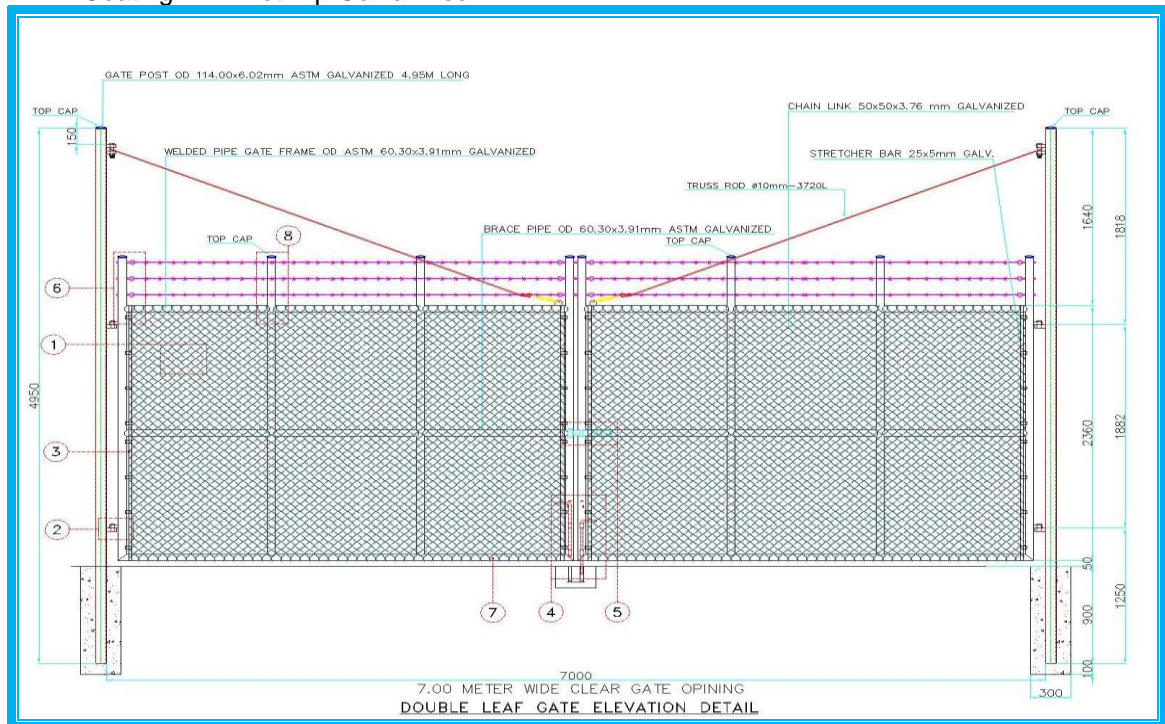

OZ Factory Company:

(An ISO 9001:2015 Accredited company)

Post Box: 31969: Riyadh - 11418: Kingdom of Saudi Arabia

Tel: 011 244 2211: Fax: 011 244 1188

Email: info@ozfactory.com.sa

